



## 30S1G6

- M1 through M3
- 30 Watts CW
- 0.7-6GHz

### Features

The Model 30S1G6 is a solid-state, Class A design, self-contained, air-cooled, broadband amplifier designed for applications where instantaneous bandwidth and high gain are required. Housed in a stylish contemporary cabinet, the unit is designed for benchtop use, but can be removed from the cabinet for immediate equipment rack mounting.




The 30S1G6, when used with a sweep generator, will provide a minimum of 30 watts of RF power. Included is a front panel gain control which permits the operator to conveniently set the desired output level. The 30S1G6 is protected from RF input overdrive by an RF input leveling circuit which controls the RF input level to the RF amplifier first stage when the RF input level is increased above 0 dBm. The RF ampli-

fier stages are protected from over-temperature by removing the DC voltage to them if an over temperature condition occurs due to cooling blockage or fan failure. There is a digital display on the front panel to indicate the operate status and fault conditions when an over-temperature or power supply fault has occurred. The unit can be returned to operate when the condition has been cleared. The 30S1G6 includes digital control for both local and remote control of the amplifier. All amplifier control functions and status indications are available remotely in GPIB/IEEE-488 format, RS-232 hardwire and fiber optic, USB, and Ethernet. The bus interface connector is located on the back panel and positive control of local or remote operation is assured by a Local/Remote switch on the front panel of the amplifier.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

30S1G6 Power Output

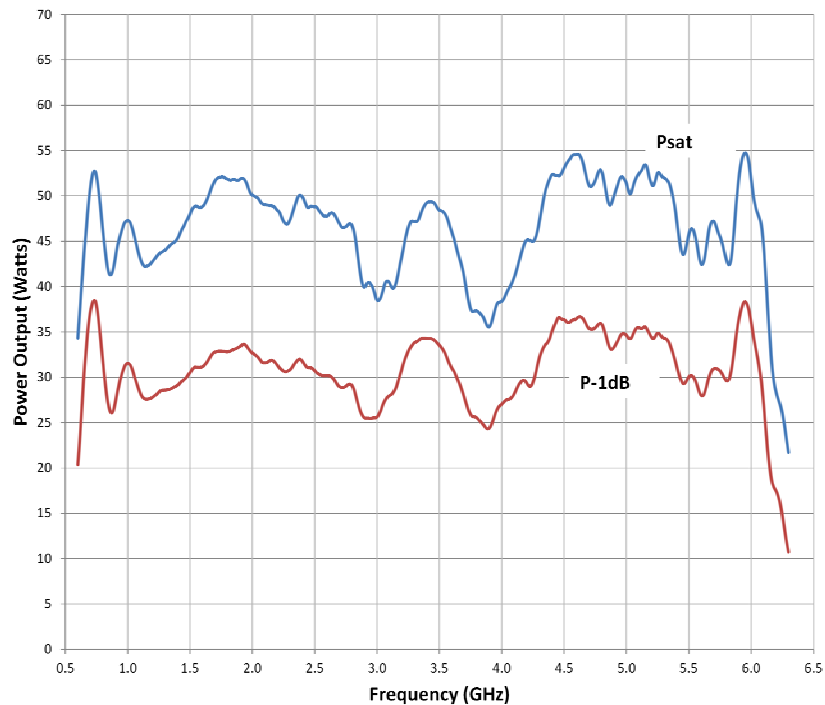

AR RF/Microwave  
Instrumentation  
160 School House Rd  
Souderton, PA 18964  
215-723-8181

For an applications engineer call: 800.933.8181

www.arworld.us

# 30S1G6

- M1 through M3
- 30 Watts CW
- 0.7–6GHz

## Specifications

**RATED POWER OUTPUT:** 30 watts minimum (0.7–6GHz)

**POWER OUTPUT @ 3dB COMPRESSION**  
Nominal 35 watts; Minimum 26 watts

**POWER OUTPUT @ 1dB COMPRESSION**  
Nominal, 30 watts; Minimum, 22 watts

**SMALL SIGNAL GAIN FLATNESS:** ±1.5 dB typical; ±2.0 dB maximum

**FREQUENCY RESPONSE:** 0.7–6GHz instantaneously

**INPUT FOR RATED OUTPUT:** 1.0 milliwatt maximum

**GAIN (at maximum setting):** 44 dB minimum

**GAIN ADJUSTMENT (Continuous Range):** 10 dB minimum (4096 steps remote)

**INPUT IMPEDANCE:** 50 ohms, VSWR 2.0:1 maximum

**OUTPUT IMPEDANCE:** 50 ohms, nominal

**MISMATCH TOLERANCE :** 100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. See Application Note #27.

**MODULATION CAPABILITY:** Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal.

**HARMONIC DISTORTION:** Minus 20 dBc maximum at 30 watts

**SPURIOUS:** Minus 73 dBc typical

**THIRD ORDER INTERCEPT POINT:** 50 dBm typical

**NOISE FIGURE:** 10 dB typical

**PRIMARY POWER (selected automatically):** 90-132, 180-264 VAC; 50/60 Hz, single phase; 300 watts maximum

**CONNECTORS:**

**RF:** Type N female

**REMOTE INTERFACES:**

- IEEE-488            24 pin female
- RS-232            9 pin Subminiature D female
- RS-232 (fiber optic) Type ST
- USB 2.0            Type B
- Ethernet            RJ-45

**SAFETY INTERLOCK:** 15 Pin Subminiature D

**COOLING:** Forced air (self contained fans)

**EXPORT CLASSIFICATION:** EAR99

## Model Configurations

MODEL	RF INPUT	RF OUTPUT	WEIGHT	SIZE (W x H x D)
30S1G6	N female, front	N female, front	18.2 kg (40 lbs)	50.3 x 15.5 x 37.6 cm 19.8 x 6.1 x 14.8 in
30S1G6M1	N female, rear	N female, rear	18.2 kg (40 lbs)	50.3 x 15.5 x 37.6 cm 19.8 x 6.1 x 14.8 in
30S1G6M2	Same as 30S1G6 with enclosure removed for rack mounting		12.5 kg (27.5 lbs)	48.3 x 12.7 x 37.6 cm 19.0 x 5.0 x 14.8 in
30S1G6M3	Same as 30S1G6M1 with enclosure removed for rack mounting		12.5 kg (27.5 lbs)	48.3 x 12.7 x 37.6 cm 19.0 x 5.0 x 14.8 in