




## Safety Products

### SHE100K6z5G

- Electric E-Field Sensor Head
- Isotropic
- 100kHz–6.5GHz
- 65dB dynamic range
- Sensitivity 0.2 V/m

### Features

The SHE100K6z5G E-field sensor head is based on a set of three mutually orthogonal diode dipoles. The three relative voltages which correspond to the spatial components are individually available at the sensor head output. An SM-series meter (required for use of this sensor head) calculates the resulting isotropic field strength.

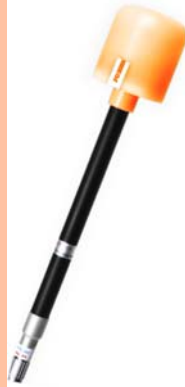

This sensor head detects electric fields from 100 kHz to 6.5 GHz covering those fields which occur in broadcasting, telecoms, ISM and industry. The high sensitivity of this sensor head makes it ideal for the measurement of human exposure to electric fields in both public and professional environments.

The sensor head is supplied with factory calibration. This model is

also available in an M1-version which includes an accredited 17025-compliant calibration.

### Typical Applications

- Industrial ovens, welding systems, RF heating, tempering and drying equipment.
- Diathermy equipment and medical devices RF generating, NMR machines.
- Power plants and related systems maintenance.
- Sensitive sites (hospitals).
- Measurements for railways and ground transport systems.
- Wireless telecommunication systems such as mobile phone base stations, satellite communication equipment, Broadcasting equipment, Wi-Fi, Wi-Max and LTE systems.

### Specifications

**Frequency Range:** 100 kHz–6.5 GHz

**Type of Frequency Response:** Flat

**Measurement Range:** 0.2–350 V/m CW

**Dynamic Range:** 65 dB

**Sensor Type:** Diode Dipoles

**Directivity:** Isotropic

#### Accuracy:

**Flatness Frequency Response:**

±1.5 dB (1 MHz–3 GHz)

±2.5 dB (3 GHz–6.5 GHz)

**Linearity:** ±0.5 dB (2–200 V/m)

**Isotropic Response (@ 100MHz):** ±0.5 dB

**Operation Temperature:** 0°C–50°C

**Size:** 327 x 60 mm, 12.88 x 2.4 in

**Weight:** 120 g, 4.25 oz

**Export Classification:** EAR99

AR RF/Microwave  
Instrumentation  
160 School House Rd  
Souderton, PA 18964  
215-723-8181

For an applications engineer call: 800.933.8181

[www.arworld.us](http://www.arworld.us)

To order AR Products, call 215.723.8181. For an applications engineer call: 800.933.8181. Direct to Service call: 215.723.0275 or email: [service@arworld.us](mailto:service@arworld.us) For Faxing Orders: 866.859.0582 (Orders Only Please) [info@arworld.us](mailto:info@arworld.us)  
Approved for public release by AR RF/Microwave Instrumentation

111615